

Ultra High Power LED

EdiPower[®] Star

Approved By Customer	Designer	Checker	Approval

Date : 2007/1/5

Version : 1.0

EDISON OPTO CORPORATION

4F, No. 800, Chung-Cheng Rd,

Chung-Ho, Taipei 235, Taiwan

Tel: 886-2-8227-6996

Fax: 886-2-8227-6997

<http://www.edison-opto.com.tw>




Contents

EdiPower star features and applications.....	2
Package outline.....	3
Absolute Maximum Rating	6
Luminous Flux and Electrical Characteristic	7
JEDEC Moisture Sensitivity.....	8
Electrical Characteristic.....	9
CCT Ranks and Part No. Specification.....	11
EdiPower Reliability.....	13
Electrical & Optical Curves-Spectrum.....	17
Package Dimensions.....	19
Label.....	20
Simple Test Method.....	21



EdiPower® Star



EdiPower® star series can provide different power-operation and different colors. They serve as optical engine appropriately and can be applied to lighting and projector.

Features



- LED lighting engine
- High power consumption
- Excellent thermal performance

Typical Applications

- Reading lights
- Portable flashlight
- LEDs lighting engine
- Security / Garden lighting
- Indoor and Outdoor Commercial lighting
- LCD Backlights / Light guides
- Architectural lighting





Package Outlines: 5W

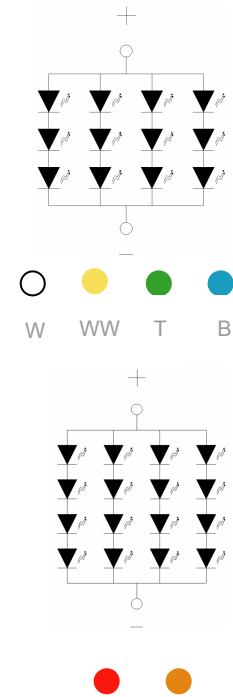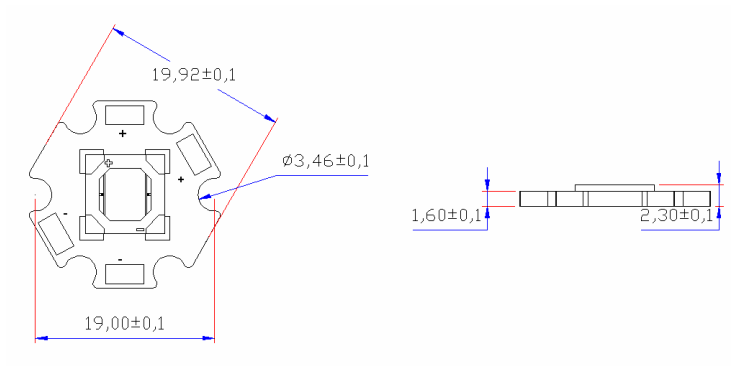





Unit: mm

Package Outlines: 10W, 20W

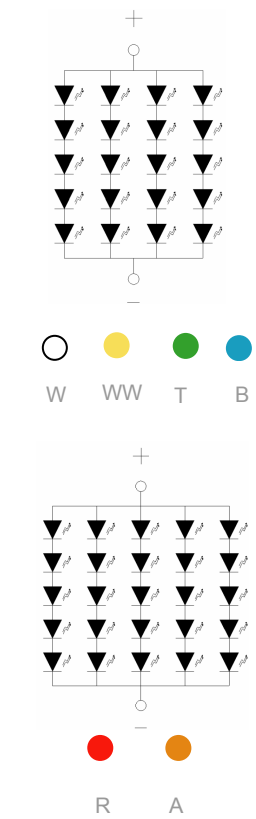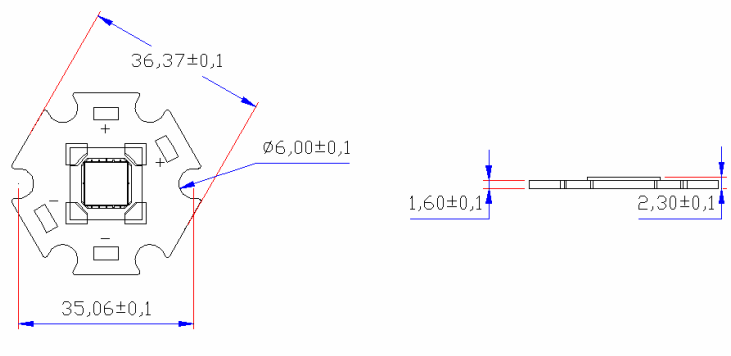



Unit: mm

Package Outlines: 15W

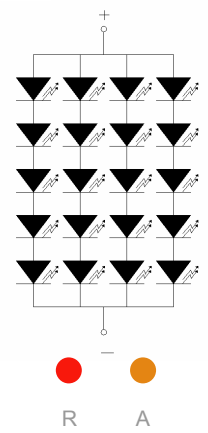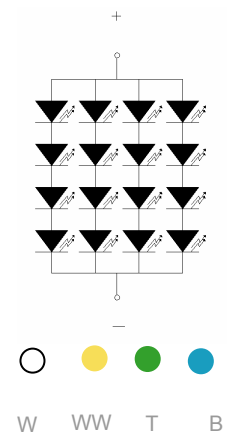
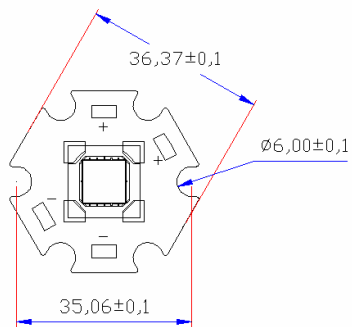


Unit: mm

Package Outlines: RGB in one package


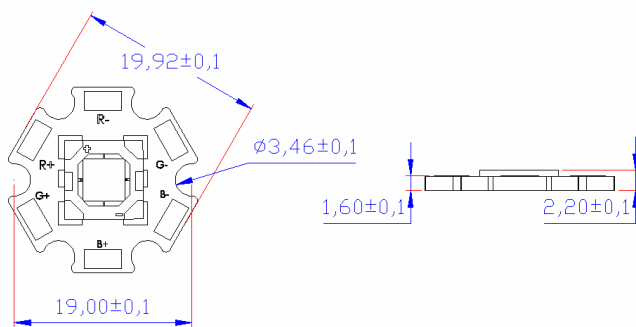


Position mark

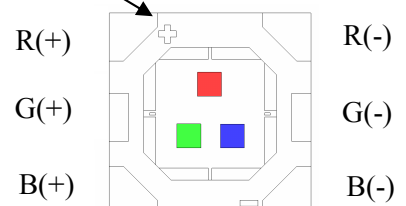

Unit: mm

Package Outlines: RGBA in one package

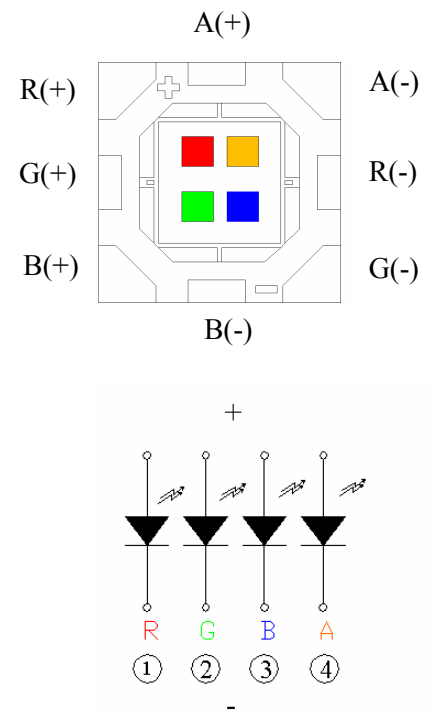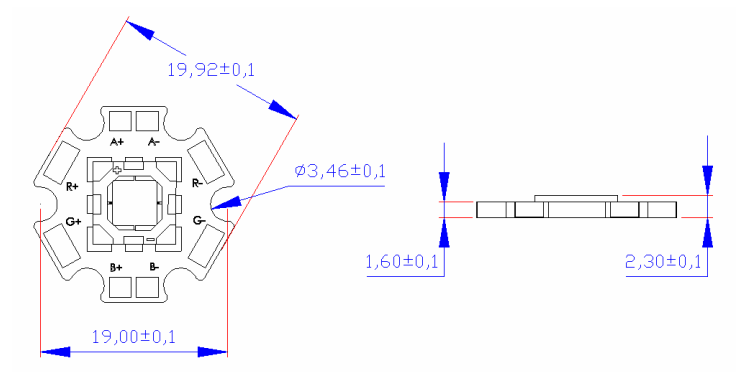

Unit: mm

Absolute Maximum Ratings

Parameter	Symbol	Rating	Units/color
DC Forward Current	I_F	0.5 A (5W)	W, WW, B,G
		0.6 A (5W)	R, A
		0.645 A (10W)	W, WW, B,G
		0.96 A (10W)	R, A
		1.12A(15W)	W, WW, B,G
		1.50A(15W)	R, A
		1.12 A (20W)	W, WW, B,G
		1.9 A (20W)	R, A
		0.35A(RGB)	R, G, B
		0.35A(RGBA)	R, G, B,A
Peak pulse current;(tp≤100μs, Duty cycle=0.005)	I_{Pulse}	1 A (5W)	W, WW, B,G
		1.2 A (5W)	R, A
		1.29 A (10W)	W, WW, B,G
		1.92 A (10W)	R, A
		2.24 A (15W)	W, WW, B,G
		3.0A(15W)	R, A
		1.12 A (20W)	W, WW, B,G
		2.24 A (20W)	W, WW, B,G
		3.8 A (20W)	R, A
		0.5A(RGB)	R, G, B
		0.5A(RGBA)	R, G, B,A

Parameter	Symbol	Rating	Units/color
LED junction Temperature	T _j	125	°C
Operating Temperature	T _{opr}	-30 ~ +110	°C
Storage Temperature	T _{stg}	-40 ~ +120	°C
Manual Soldering Time at 400°C (Max.)	T _{sol}	10 seconds	3 times
LED Substrate Temperature	T _s	<100	°C
Reverse Voltage	V _R	5	V
Reverse Current(V _R =5V)	I _R	50	μA
ESD Sensitivity	V _B	2,000	V
Isolation Voltage for emitter	V _i	50 (R,A) 1,000 (W,WW,G,B)	V
Isolation voltage for Aluminum PCB	V _i	200	V
Transient Surge Voltage for emitter	TSV	28 (5W) 32 (10W,15W, 20W)	V

Luminous Flux and Electrical Characteristics

Power Consumption	Part Name	Color	Typ. Voltage (V)	Test Current (A)	Luminous Flux (lm)	Thermal Resistance To Case (°C/W)
5W	EP5W-2S00	White	10.4	0.50	250	5
	EP5X-2S00	Warm White	10.4	0.50	150	5
	EP5R-2S00	Red	8.4	0.60	130	5
	EP5A-2S00	Amber	8.4	0.60	130	5
	EP5T-2S00	True Green	10.4	0.50	150	5
	EP5B-2S00	Blue	10.4	0.50	70	5
Power Consumption	Part Name	Color	Typ. Voltage (V)	Test Current (A)	Luminous Flux (lm)	Thermal Resistance To Case (°C/W)
10W	EPAW-2S00	White	17.5	0.645	500	2
	EPAX-2S00	Warm White	17.5	0.645	300	2
	EPAR-2S00	Red	10.5	0.960	250	2
	EPAA-2S00	Amber	10.5	0.960	250	2
	EPAT-2S00	True Green	17.5	0.645	300	2
	EPAB-2S00	Blue	17.5	0.645	140	2

Power Consumption	Part Name	Color	Typ. Voltage (V)	Test Current (A)	Luminous Flux (lm)	Thermal Resistance To Case (°C/W)
15W	EPLW-4S00	White	13.5	1.12	750	2
	EPLX-4S00	Warm White	13.5	1.12	450	2
	EPLR-4S00	Red	8.8	1.50	350	2
	EPLA-4S00	Amber	8.8	1.50	350	2
	EPLT-4S00	True Green	13.5	1.12	630	2
	EPLB-4S00	Blue	13.5	1.12	210	2
Power Consumption	Part Name	Color	Typ. Voltage (V)	Test Current (A)	Luminous Flux (lm)	Thermal Resistance To Case (°C/W)
20W	EPBW-4S00	White	17.8	1.12	1000	2
	EPBX-4S00	Warm White	17.8	1.12	600	2
	EPBR-4S00	Red	10.5	1.90	500	2
	EPBA-4S00	Amber	10.5	1.90	500	2
	EPBT-4S00	True Green	17.8	1.12	800	2
	EPBB-4S00	Blue	17.8	1.12	280	2

JEDEC Moisture Sensitivity:

Level	Floor Life		Soak Requirements			
	Time	Conditions	Standard Time (hours)	Standard Conditions	Accelerated Environment Time (hours)	Accelerated Environment Conditions
2a	4 weeks	≤30°C / 60% RH	696 +5/-0	30°C / 60% RH	120 +1/-0	60°C / 60% RH

LEVEL	FLOOR LIFE		SOAK REQUIREMENTS			
			STANDARD		ACCELERATED EQUIVALENT ¹	
	TIME	CONDITIONS	TIME (hours)	CONDITIONS	TIME (hours)	CONDITIONS
1	Unlimited	≤30°C/85% RH	168 +5/-0	85°C/85% RH		
2	1 year	≤30°C/60% RH	168 +5/-0	85°C/60% RH		
2a	4 weeks	≤30°C/60% RH	696 ² +5/-0	30°C/60% RH	120 +1/-0	60°C/60% RH
3	168 hours	≤30°C/60% RH	192 ² +5/-0	30°C/60% RH	40 +1/-0	60°C/60% RH
4	72 hours	≤30°C/60% RH	96 ² +2/-0	30°C/60% RH	20 +0.5/-0	60°C/60% RH
5	48 hours	≤30°C/60% RH	72 ² +2/-0	30°C/60% RH	15 +0.5/-0	60°C/60% RH
5a	24 hours	≤30°C/60% RH	48 ² +2/-0	30°C/60% RH	10 +0.5/-0	60°C/60% RH
6	Time on Label (TOL)	≤30°C/60% RH	TOL	30°C/60% RH		

Note

The standard soak time includes a default value of 24 hours for semiconductor manufacturer's exposure time (MET) between bake and bag and includes the maximum time allowed out of the bag at the distributor's facility.

Chip Characteristics for single color

Color	Dominant Wavelength (λ_d)nm	Forward Voltage (V)
Red	620~630	1.90~2.35
True Green	520~530	3.00~3.65
Blue	465~475	3.00~3.65
Amber	585~595	1.90~2.35

Chip Characteristics for RGB or RGBA in one (EP3M-4S00 and EP4M-4S00, 40 mil chip size)

Color	Dominant Wavelength (λ_d)nm	Forward Voltage (V)	Test current (A)	Luminous Flux (lm)
Red	625~630	1.9~2.2	0.35	25
True Green	520~525	3.2~3.5	0.35	35
Blue	455~460	3.4~3.7	0.35	12
Amber	590~595	1.9~2.2	0.35	25

Electrical Characteristics

Power Consumption	Part Name	Color	Min. Voltage (V)	Typ. Voltage (V)	Max. Voltage (V)
5W	EP5W-2S00	White	9.3	10.2	11.4
	EP5X-2S00	Warm White	9.3	10.2	11.4
	EP5R-2S00	Red	8.0	9.2	10.8
	EP5A-2S00	Amber	8.0	9.2	10.8
	EP5T-2S00	True Green	9.3	10.2	11.4
	EP5B-2S00	Blue	9.3	10.2	11.4

Power Consumption	Part Name	Color	Min. Voltage (V)	Typ. Voltage (V)	Max. Voltage (V)
10W	EPAW-2S00	White	16.6	17.5	18.3
	EPAX-2S00	Warm White	16.6	17.5	18.3
	EPAR-2S00	Red	11.0	10.5	13.0
	EPAA-2S00	Amber	11.0	10.5	13.0
	EPAT-2S00	True Green	16.6	17.5	18.3
	EPAB-2S00	Blue	16.6	17.5	18.3

Power Consumption	Part Name	Color	Min. Voltage (V)	Typ. Voltage (V)	Max. Voltage (V)
15W	EPLW-4S00	White	12.8	13.5	14.7
	EPLX-4S00	Warm White	12.8	13.5	14.7
	EPLR-4S00	Red	8.0	8.8	10.4
	EPLA-4S00	Amber	8.0	8.8	10.4
	EPLT-4S00	True Green	12.8	13.5	14.7
	EPLB-4S00	Blue	12.8	13.5	14.7

Power Consumption	Part Name	Color	Min. Voltage (V)	Typ. Voltage (V)	Max. Voltage (V)
20W	EPBW-4S00	White	16.6	17.8	18.3
	EPBX-4S00	Warm White	16.6	17.8	18.3
	EPBR-4S00	Red	10.0	10.5	13.0
	EPBA-4S00	Amber	10.0	10.5	13.0
	EPBT-4S00	True Green	16.6	17.8	18.3
	EPBB-4S00	Blue	16.6	17.8	18.3

CCT ranks

CCT Group	CCT (°K)
Warm White	2,700 ~ 3,300
X1	2,700 ~ 2,900
X2	2,900 ~ 3,100
X3	3,100 ~ 3,300
White	5,200 ~ 7,200
W1	5,200 ~ 5,600
W2	5,600 ~ 6,000
W3	6,000 ~ 6,400
W4	6,400 ~ 6,800
W5	6,800 ~ 7,200

Part No.Spec.

Power Consumption	Part Name	Color	Chip Connection	Note
5W	EP5W-2S00	White	3 series 4 parallel	With Aluminum PCB
	EP5X-2S00	Warm White	3 series 4 parallel	With Aluminum PCB
	EP5R-2S00	Red	4 series 4 parallel	With Aluminum PCB
	EP5A-2S00	Amber	4 series 4 parallel	With Aluminum PCB
	EP5T-2S00	True Green	3 series 4 parallel	With Aluminum PCB
	EP5B-2S00	Blue	3 series 4 parallel	With Aluminum PCB
Power Consumption	Part Name	Color	Chip Connection	Note
10W	EPAW-2S00	White	5 series 4 parallel	With Aluminum PCB
	EPAX-2S00	Warm White	5 series 4 parallel	With Aluminum PCB
	EPAR-2S00	Red	5 series 5 parallel	With Aluminum PCB
	EPAA-2S00	Amber	5 series 5 parallel	With Aluminum PCB
	EPAT-2S00	True Green	5 series 4 parallel	With Aluminum PCB
	EPAB-2S00	Blue	5 series 4 parallel	With Aluminum PCB
	EPBB-4S00	Blue	5 series 4 parallel	With Aluminum PCB

Power Consumption	Part Name	Color	Chip Connection	Note
15W	EPLW-4S00	White	4 series 4 parallel	With Aluminum PCB
	EPLX-4S00	Warm White	4 series 4 parallel	With Aluminum PCB
	EPLR-4S00	Red	4 series 5 parallel	With Aluminum PCB
	EPLA-4S00	Amber	4 series 5 parallel	With Aluminum PCB
	EPLT-4S00	True Green	4 series 4 parallel	With Aluminum PCB
	EPLB-4S00	Blue	4series 4 parallel	With Aluminum PCB
Power Consumption	Part Name	Color	Chip Connection	Note
20W	EPBW-4S00	White	5 series 4 parallel	With Aluminum PCB
	EPBX-4S00	Warm White	5 series 4 parallel	With Aluminum PCB
	EPBR-4S00	Red	5 series 5 parallel	With Aluminum PCB
	EPBA-4S00	Amber	5 series 5 parallel	With Aluminum PCB
	EPBT-4S00	True Green	5 series 4 parallel	With Aluminum PCB
	EPBB-4S00	Blue	5 series 4 parallel	With Aluminum PCB

EdiPower® Reliability

When we talk about MTBF of EdiPower®, we can provide a formula for customers.

$$\log(\text{Life}) = \frac{1,600}{T_j(^{\circ}\text{C}) + 273}$$

Life means the time light output decay 30% (L70%)

T _j (°C)	Life (hours)
25	234,000
30	191,000
35	157,000
40	129,000
45	107,000
50	90,000
55	75,000
60	64,000
65	54,000
70	46,000
75	39,600
80	34,000
85	29,500
90	25,700
100	19,500
105	17,100
110	15,100
115	13,300
120	11,700
125	10,500
130	9,300
135	8,300
140	7,500
150	6,000

ASSIST FORM about High Power LED Reliability (5W EdiPower® White, Warm White, Blue, Green) Ts=ceramic substrate temperature

	Ts=45°C	Ts=65°C	Ts=85°C
Voltage	10.2V	10.2V	10.2V
Current	500mA	500mA	500mA
Wattage	5.1W	5.1W	5.1W
Heat	5.0W	5.0W	5.0W
Rth	5.0 °C/W	5.0 °C/W	5.0 °C/W
Tj	70 °C	90 °C	110 °C
L_{70%}	46,000hrs	25,700hrs	15,100hrs

ASSIST FORM about High Power LED Reliability(10W EdiPower® White, Warm White, Blue, Green)

	Ts=45°C	Ts=65°C	Ts=85°C
Voltage	17.2V	17.2V	17.2V
Current	600mA	600mA	600mA
Wattage	10.32W	10.32W	10.32W
Heat	10.0W	10.0W	10.0W
Rth	2.0 °C/W	2.0 °C/W	2.0 °C/W
Tj	65 °C	85 °C	105 °C
L_{70%}	54,000hrs	29,500hrs	19,500hrs

ASSIST FORM about High Power LED Reliability(15W EdiPower® White, Warm White, Blue, Green)

	Ts=45°C	Ts=65°C	Ts=85°C
Voltage	13.5V	13.5V	13.5V
Current	1120mA	1120mA	1120mA
Wattage	15.12W	15.12W	15.12W
Heat	15.0W	15.0W	15.0W
Rth	2.0 °C/W	2.0 °C/W	2.0 °C/W
Tj	85 °C	105 °C	125 °C
L_{70%}	29,500hrs	19,500hrs	10,500hrs

ASSIST FORM about High Power LED Reliability(20W EdiPower® White, Warm White, Blue, Green)

	Ts=45°C	Ts=65°C	Ts=85°C
Voltage	17.8V	17.8V	17.8V
Current	1120mA	1120mA	1120mA
Wattage	20.0W	20.0W	20.0W
Heat	20.0W	20.0W	20.0W
Rth	2.0 °C/W	2.0 °C/W	2.0 °C/W
Tj	85 °C	105 °C	125 °C
L_{70%}	29,500hrs	19,500hrs	10,500hrs

How to Know Tj in Your Application?

a. junction to case

Rth=5 °C/W for 5W between junction to case

$$\Delta T = 5 \times 5 = 25 \text{ °C}$$

Rth=4 °C/W for 10W, 15W and 20W between junction to case

For 10W device $\Delta T = 3 \times 10 = 30 \text{ °C}$

For 15W device $\Delta T = 3 \times 15 = 45 \text{ °C}$

For 20W device $\Delta T = 3 \times 20 = 60 \text{ °C}$

b. case to board

The thermal grease is 200um.

K(MCPCB)=1.4 W/mk for 5W between case to board

$$\text{Then Rth(case-board)} = \frac{200}{1.4 \times (8.4 \times 8.4)} = 2.0$$

For 5W device $\Delta T = 2 \times 5 = 10 \text{ °C}$

K(MCPCB)=1.4 W/mk for 10W ,15W and 20W between case to board

$$\text{Then Rth(case-board)} = \frac{200}{1.4 \times (14.5 \times 14.5)} = 0.7$$

For 10W device $\Delta T = 0.7 \times 10 = 7 \text{ °C}$

For 15W device $\Delta T = 0.7 \times 15 = 10.5 \text{ °C}$

For 20W device $\Delta T = 0.7 \times 20 = 14 \text{ °C}$

c. board to air

The Rth between board and air is mainly dependent on the total surface air.

$$R_{th}(\text{board-air}) \approx \frac{500}{\text{Area}(\text{cm}^2)}$$

For 5W

If heat sink area is 100cm² Rth=5.0

If heat sink area is 150cm² Rth=3.3

For 10W ,15W and 20W

If heat sink area is 300cm² Rth=1.7

If heat sink area is 600cm² Rth=0.8

d. ΔT totally

For 5W

If heat sink area is 100cm² Rth=5.0 ΔT=25+10+5x5=60 °C

If heat sink area is 150cm² Rth=3.3 ΔT=25+10+3.3x5=51.5 °C

For 10W

If heat sink area is 300cm² Rth=1.7 ΔT=20+7+1.7x10=44 °C

If heat sink area is 600cm² Rth=0.8 ΔT=20+0.8x10=35 °C

For 15W

If heat sink area is 300cm² Rth=1.7 ΔT=30+10.5+1.7x15=66 °C




If heat sink area is 600 cm² Rth=0.8 ΔT=30+10.5+0.8x15=52.5 °C

For 20W


If heat sink area is 300cm² Rth=1.7 ΔT=40+14+1.7x20=88 °C

If heat sink area is 600cm² Rth=0.8 ΔT=40+14+0.8x20=70 °C


Electrical & Optical Curves-Spectrum

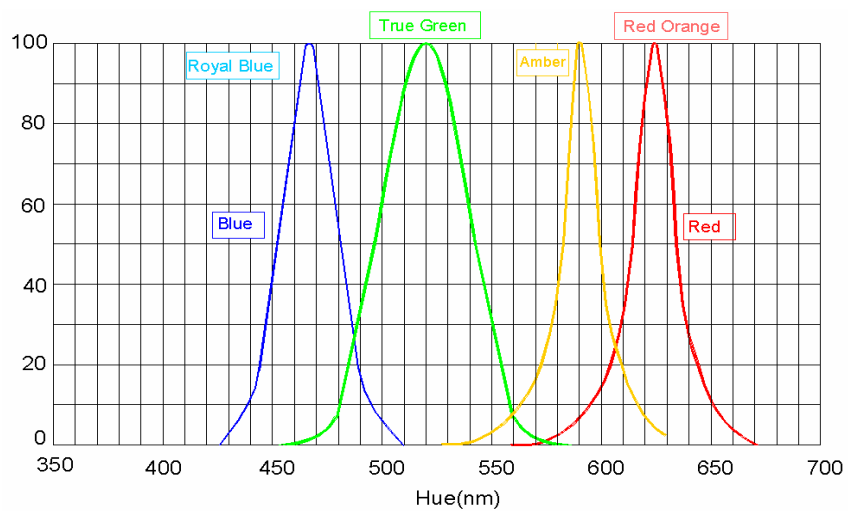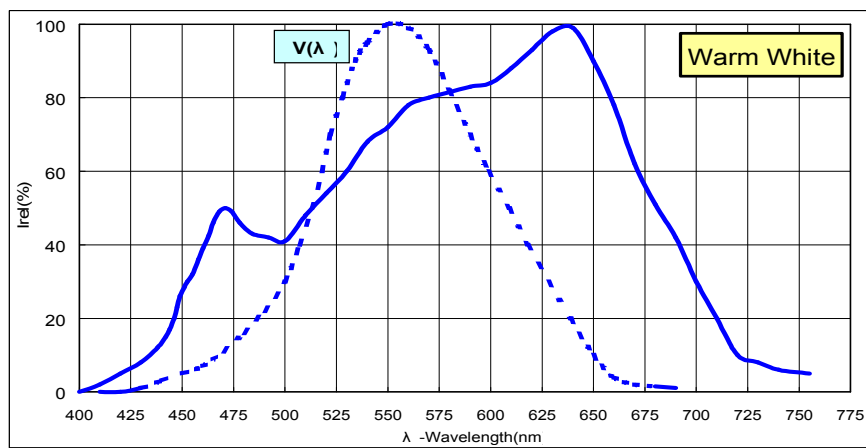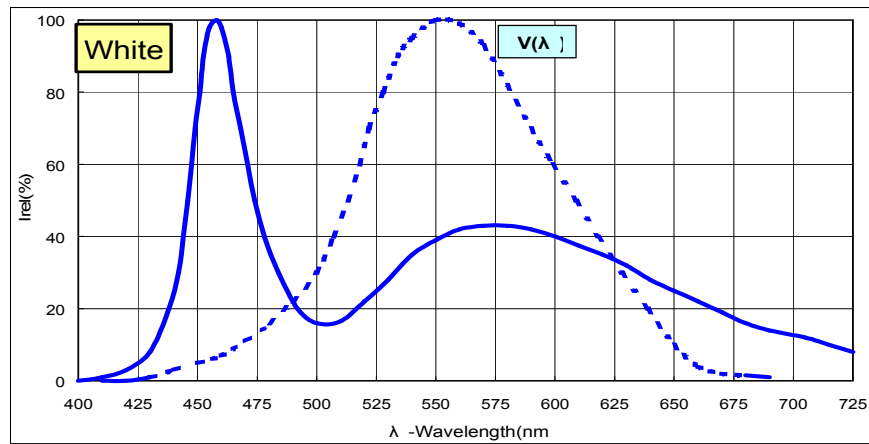


Typical Radiation Pattern (5W, 10W, 20W, White, Warm White, Blue, Green, Amber and Red)

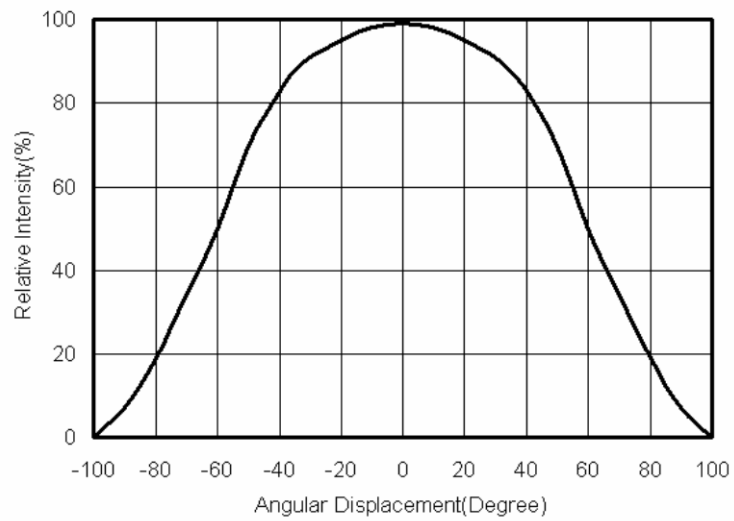


Luminous Flux v.s. Junction Temperature

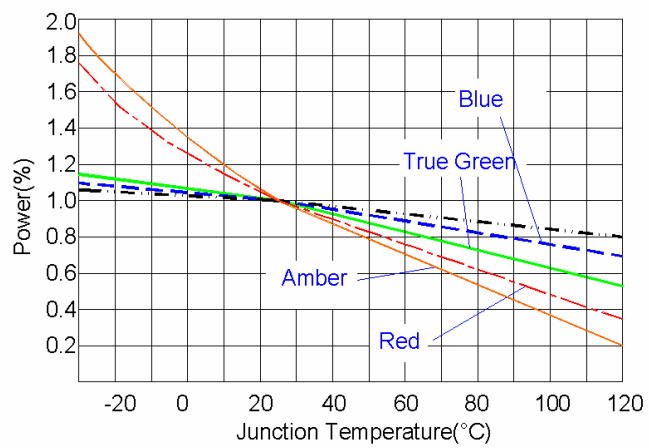

Package Information



3W,RGB star (100 pcs)
4W RGBA star (100 pcs)
5W star (100 pcs)



10W, 15W, 20W star (25 pcs)



Tray

Dimension: 33x33 cm (5W)

22x24 cm (10W)

22x24 cm (15W)

22x24 cm (20W)

Antistatic bag

Dimension: 55x55 cm

5 trays inside for 5W,RGB,RGBA

10trays inside for 10W,15W, 20W

Package

Dimension: 70x70x15 cm

5 antistatic bags inside

(500 pcs for 5W,RGB,RGBA)

(250 pcs for 10W,15W and 20W)

Power Consumption	Emitter(g)	Tray(g)	Antistatic bag(g)	Package(g)
5W				
3W, RGB	1.5	200	1000	6500
4W RGBA				
10W, 15W, 20W	4.0	130	1300	8000

Label

E P 5 W - 2 E 0 0

X1 X2 X3 X4 X5 X6

X1 LED Item		X2 Power		X3 Emitting Color			X4 Material	X5 Lens Item		X6 Serial No.
Code	Type	Code	Type	Code	Type			Code	Type	
EP	EdiPower®	3	3W	W	White	○		E	Emitter	
		4	4W	X	Warm White	●		S	Star	
		5	5W	R	Red	●		H	Housing	
		A	10W	A	Amber	●				
		L	15W	T	True Green	●				
		B	20W	B	Blue	●				
				M	Multi Color					


Handling Precautions:

1. Please do not use tweezer to touch the surface of silicone (emitting area).
2. Please do not press or touch the surface of silicone (emitting area).
3. Please wear anti-static wrist or glove to prevent ESD damage when assembling.
4. Please do not let EdiPower® star fall down or press the surface of ceramic
5. Please do not drill any hole on star top or rear surface.

Simple Test Method

Heat dissipation must be cared even testing pulse is short, otherwise some interface will be damaged.

5W

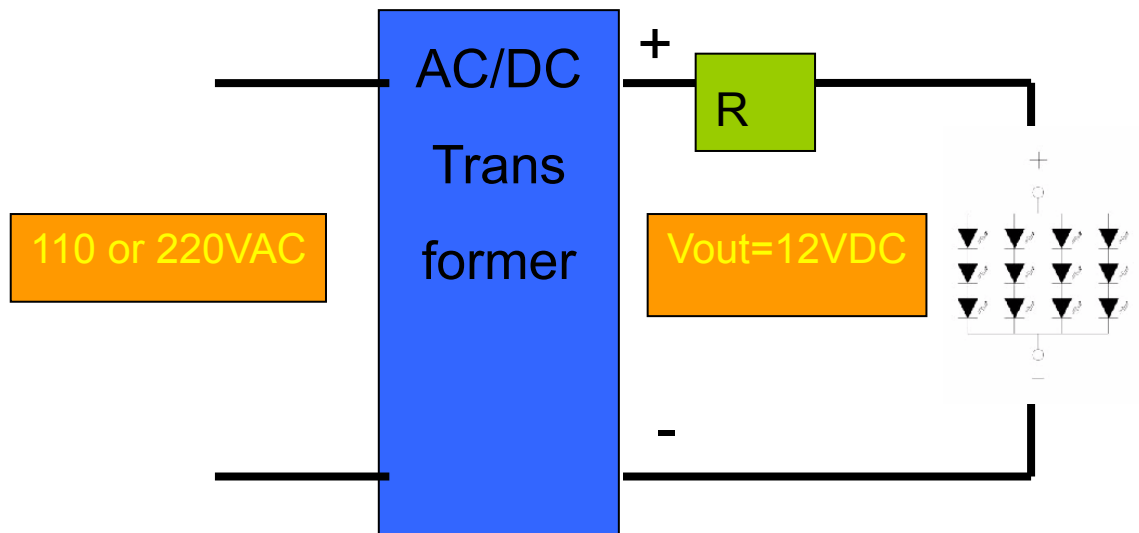


$R=4\Omega$ for white, warm white, Green and Blue

$R=6\Omega$ for red and Amber

10W for White, Warm White, Green and Blue

Driver: EP-A10C-700 (110V)

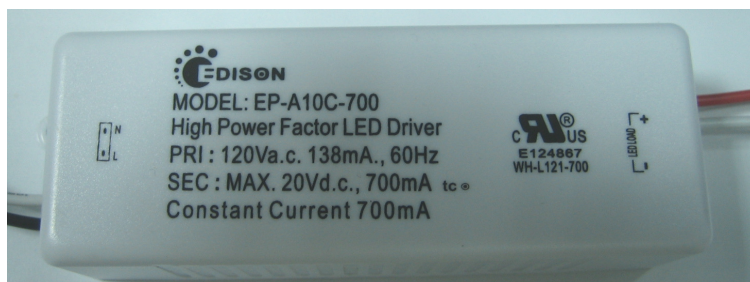


Driver: EP-B10C-700 (220V)



10W for Red and Amber

Driver: EP-A20C-1050 (110V)

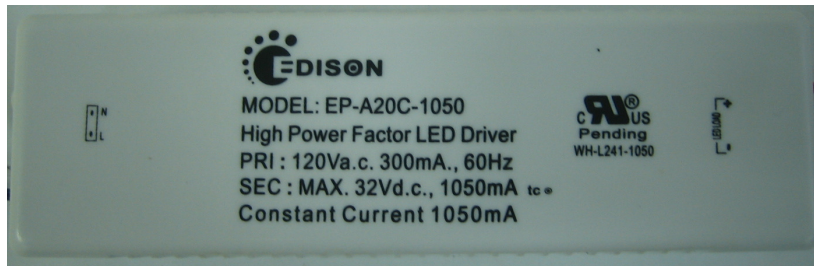


Driver: EP-B20C-1050 (220V)



15W,20W for White, Warm White, Green and Blue

Driver: EP-A20C-1050 (110V)

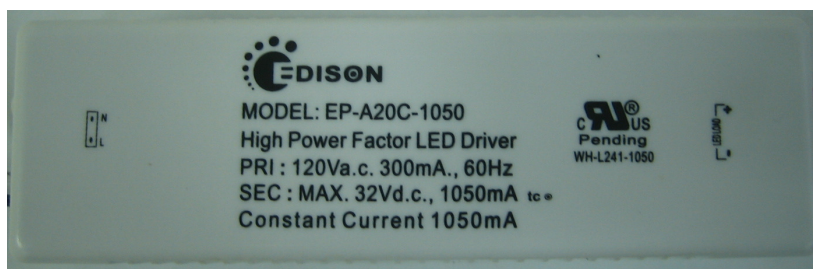

Driver: EP-B20C-1050 (220V)



Note: Detail driver specification please see LED driver data sheet.